

TECHNICAL DATA SHEET – savE® HS 34

savE® Phase Change Materials (PCM) are organic or inorganic chemical compounds that have large amount of heat energy stored in the form of Latent Heat which is absorbed or released when the materials change state from solid to liquid or liquid to solid. The PCM retains its latent heat without any change in physical or chemical properties over thousands of cycles. Various specific temperature savE® PCM's are commercially available (-33⁰C to +89⁰C) depending upon the applications.

Applications

PCM provides energy efficient solutions for many industries including:

- Insulation for Building and Piping Products
- Biopharmaceutical Transportation
- Telecommunications and Heat Sinks
- Hot and Cold Storage
- Food / Poultry / Milk Products Transportation
- Boiler and Hot Water Systems Industry looking to exploit Off-Peak Electricity Tariffs / Reducing Chilling Equipment Costs by storing energy at off-peak hours

However there is no limit as to who can apply PCM technology to their operation, to improve thermal management, cost and energy efficiencies.

PLUSS® Encapsulation

Pluss® pioneered the use of HDPE panels as encapsulation for PCMs in India. Our calculations for total heat transfer across thin membranes show that HDPE/ PP is as good as aluminum, stainless steel, etc. Pluss® encapsulations are thin enough to give good overall heat transfer coefficient with good mechanical strength.

savE® - HS 34

savE® - HS 34 is an inorganic chemical based PCM having freezing temp. of 34⁰ C. It stores thermal energy as latent heat in its crystalline form. On changing phase this latent heat is released or absorbed, allowing the ambient temperature within the system to be maintained

savE[®] - HS 34 is constituted of the right mix of various salts, additives and nucleating agents allowing equilibrium between solid and liquid phases to be attained at the melting point. The *savE[®]* HS 34 is free flowing in molten state and can be encapsulated in various forms .

Why *savE[®]* HS 34?


savE[®] - HS 34 has a freezing temperature of 34^o C, a temperature that makes it ideal for several heating/cooling thermal energy applications, a temperature that makes it ideal for several heating/cooling thermal energy applications. Some of its salient features include:

- The PCM is chemically and thermally stable by using **PLUSS[®]** proprietary additives
- Mixture of Organic Salts


Technical Specification:

Product	: <i>savE[®]</i>
Series	: HS 34
Description	: Mixture of Inorganic salts
Appearance	: Light White/Grey coloured liquid

T-History Test

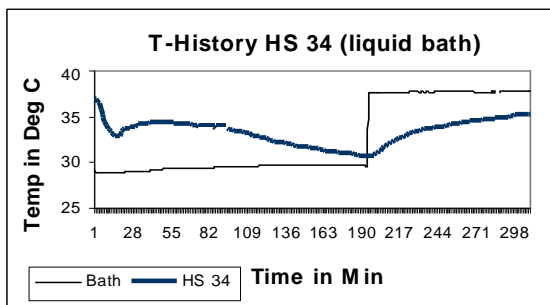

T-History graph for *savE[®]* HS 34

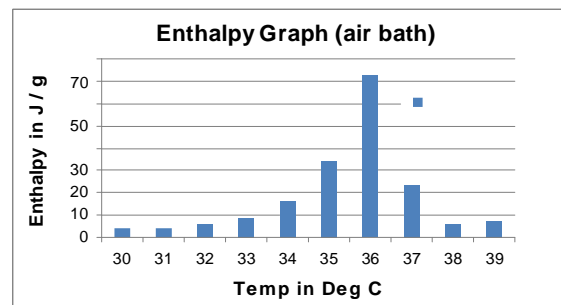

Enthalpy Vs Temp for *savE[®]* HS 34

A 55g sample is taken in a test tube in molten condition and placed in a temperature controlled bath. A temperature sensor is placed in the test tube and bath to record the temperatures using a datalogger. The bath is maintained at around 30 °C during the freezing cycle and at 38 °C during the melting cycle.

Property	Value*	Test Method	Test Conditions (if any)
Melting Temp. (°C)	35	PLUSS® T - History	@ 38 °C (liquid bath)
Freezing Temp. (°C)	34	PLUSS® T - History	@ 30 °C (liquid bath)
Latent Heat (kJ/kg)	150	Calorimetry	solid PCM is taken at 24 °C
Liquid Density (kg/m ³)	1850	ASTMD891-95	@ 44 °C
Solid Density (kg/m ³)	1980	PLUSS® Internal	@ 24 °C
Liquid Specific Heat (J/g.K)	2.35	Calorimetry	@ 44 °C
Solid Specific Heat (J/g.K)	N.A.	-	-
Thermal Conductivity (W/m.K)	0.47	Theoretical Value**	For Liquid
Thermal Conductivity (W/m.K)	0.5 to 0.6	Theoretical Value**	For Solid
Base Material	Inorganic -		-
Congruent Melting	Yes	-	-
Flammability	No	-	-
Thermal Stability (cycles)	~2000	PLUSS® Internal	-
Max. Operating Temp. (°C)	~80	-	-

*- Nominal Values. Actual values lie in a range. Consult test certificate for details.

** - Calculated from literature value

Pluss Polymers Pvt. Ltd.

610 A, Udyog Vihar, Phase V, Gurgaon -122016 Haryana (India)

Tel: +91 124 4309490 / 91 / 92, Fax: +91 124 4309493

Email: info@pluss.co.in, Website: www.pluss.co.in, www.thermalenergystorage.in

The information given here is meant as a guide to determining suitability of our products for the stated applications. The products are intended for use in industrial applications. The users should test the materials before use and satisfy themselves with regard to contents and suitability in the desired application. We guarantee that our products will meet our written specifications. Nothing herein shall constitute any other warranty expressed or implied. Recommendation herein may not be construed as freedom to infringe/operate under any third party patents. In the event of a proven claim, our liability is limited only to replacement of our material and in no case shall we be liable for special, incidental or consequential damages arising out of usage of our material. Contents of this datasheet are subject to change without prior notice.

